



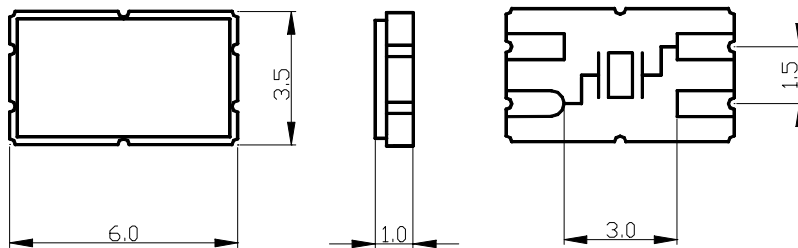

C2 TYPE--SMD 3.5X6 CERAMIC PACKAGE

Standard Specifications

Frequency Range	10.000~36.000 MHz
Mode of Vibration	Fundamental
Drive Level	0.1 mW
Load Capacitance	10pF MIN
Frequency Tolerance	$\pm 10\text{ppm}$ to $\pm 50\text{ppm}$
Shunt Capacitance	7.0 pF (MAX)
Operating Temperature Range	-20°C ~ +70°C Standard
Frequency Stability	$\pm 30\text{ppm}$ Standard
Storage Temperature Range	-40°C ~ +85°C
Equivalent Series Resistance	60 Ω (MAX)
Aging (First Year)	$\pm 5\text{ppm}$



All Dimensions in mm