

DE FACTO INDUSTRY STANDARD CRYSTAL MEASUREMENT SYSTEM WITH OVER 5,000 UNITS IN USE WORLDWIDE

- High speed computer controlled network analyzer
- Fully featured graphical software for quartz crystal, ceramic resonator and network analyzer measurements
- Extensive drive level dependency measurements at 10 ms per point
- Over 50 different crystal parameter measurements
- Precision FL measurements
- Multiple spurious sweeps
- Test fixtures available for SMD, leaded, blank, and low frequency crystals
- All data is published in an ODBC compatible data base in real time
- Custom printouts can be created using *Crystal Reports*[®] (optional)
- Optional custom integration with OLE, RS-232 and BCD interfaces
- Upgradeable to a 250C 500 MHz Network Analyzer



SPECIFICATIONS





Frequency Range:	15 KHz to 220 MHz
Frequency Correlation:	± 1 ppm* at series (typical)
Crystal Power:	100 pW to 1000 uW (1 MHz to 50 MHz) 1 nW to 500 uW (>50 MHz)
Channels:	Two
Computer Requirements:	Minimum 500 MHz Pentium III, one full PCI slot with +5V & 3.3V power, <i>Windows 98</i> [®] or <i>Windows XP</i> [®]

* Proprietary measurement and calibration algorithms provide correlation to industry standard crystal measurement equipment.

Roditi International Corp. Ltd,

Machiavelli House, 102 Stewarts Road, London. SW8 4UG. Tel: +44 (0) 20 7819 8080
FAX: +44 (0) 20 7720 5261 E-Mail saunders@roditi.com - World Wide Web <http://www.roditi.com>

GRAPHICAL DISPLAYS

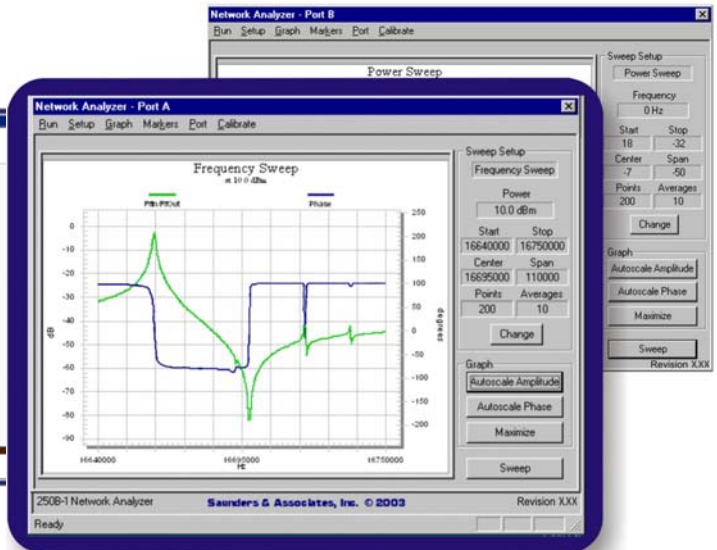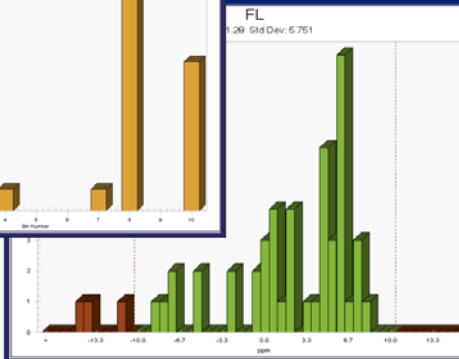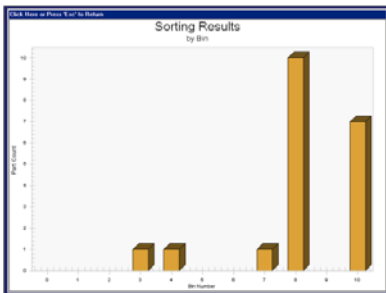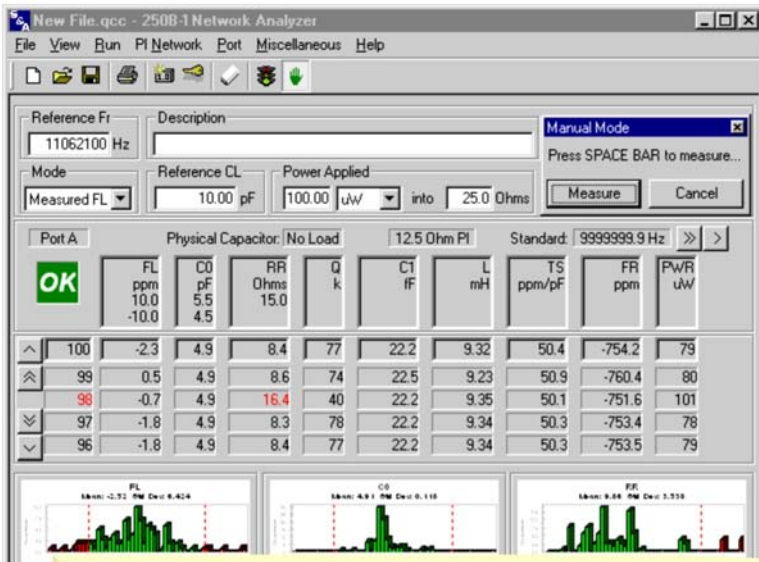

The Roditi International Corporation Ltd is the exclusive European representative of Saunders & Associates, LLC